

Avolites Ltd.


Engineering Change Notice

Title	A2K Ctrl Card Mains Capacitor Modification
ECN Number	ECN-0149
Equipment	A2K CTRL CARD
Author	Robert Henry
Drawing Number	
Date	26/09/2002

Reason for ECN	Mains Resistors burning out caps (C11, C12, C13)
Special Parts required	3 X 100nF X2 250V AC (06-03-0116)
Special Tools required	Dimmer Tape 50x30mm

Work Required

Replace the capacitors onto underside of the CTRL card

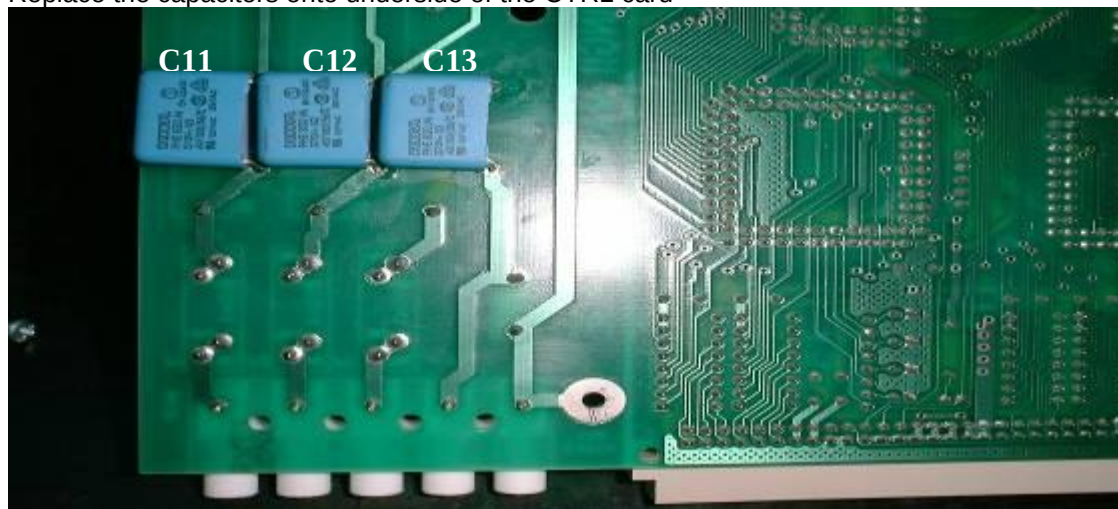

Place dimmer tape on ctrl tray below location of Caps

